


我们正在重新定义缝纫机

ZJ-AM5-AH-B-K-800

中捷全自动模板机

【智】在颠覆 领跑未来

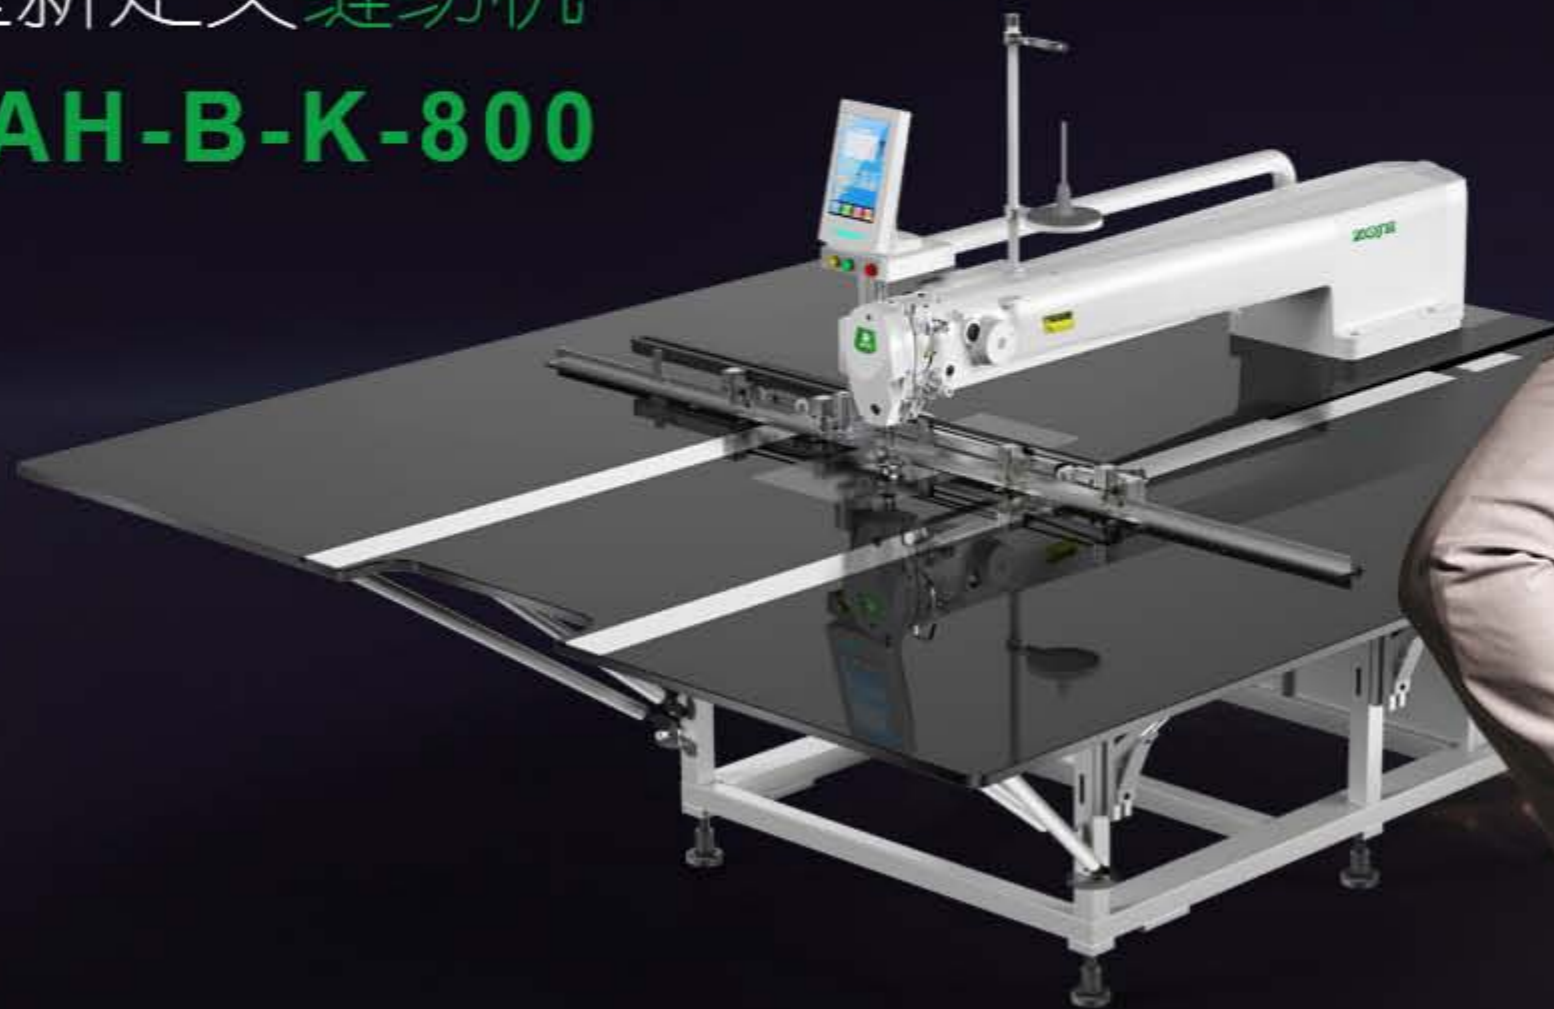

形象大使
吕良伟

21世纪服装设备的革命
从一人一机到一人多机，无需熟练技术即可上岗操作智能高效、
全模板自动化操作，颠覆传统服装作业模式

Greatest garments equipment revolution in the 21st century.
From one worker operates one machine to more machines.
Even workers without any experience can work immediately. It adopts high-efficiency
intelligent automatic operation, upend the traditional assignment mode.



扫一扫更多
信息
Scan for more
information

干式机头·MINI OIL



ZJ-AM5-AH SERIES

全自动模板机
INTELLIGENT AUTO PATTERN SEWING MACHINE

特种机系列
SPECIAL FUNCTION SERIES

- 效率高、利润回报快、用工少
High-efficiency, quick profit return, less labor.
- 无限大 x 900 的缝制范围
Sewing range: infinity * 900
- 3200最高缝速，999个模板识别功能
Max sewing speed 3200rpm, automatic identification 999 templates.
- 同步带传动板等创新机械机构
Innovative synchronous belt transmission mechanism.
- 功能强大的智能闭环电控系统
Strong functional closed-loop control system.
- 采用锁式线迹技术，线迹美观牢固
Adopt lockstitch technique, the stitch is beautiful and solid.
- 新型激光切刀机构，减少工序
New type cutting mechanism, reducing the workspaces.

一体式圆弧导轨设计和新型
压框机构
Integrated circular arc guide design
and new press frame mechanism



360° 智能自动切刀
功能强大轻松应对各种工序
strong adaptability, easily apply to
various processes



创新自动换梭机构
Innovative automatic hook-changing
mechanism



ZJ-AM5-AH-B-K-800	DPX5 7-12E (表面缝线) DPX5 7-12E(I) on the surface	3200rpm(针长3.5mm以下) 3200rpm(stitch length less than 3.5mm)	X号无限大, Y号实际800mm X-axis infinite, Y-axis 800mm	0.1-12.7mm(0.05mm/单位) 0.1-12.7mm(0.05mm/unit)
ZJ-AM5-AH-B-K-900	DPX5 7-12E (表面缝线) DPX5 7-12E(I) on the surface	3200rpm(针长3.5mm以下) 3200rpm(stitch length less than 3.5mm)	X号无限大, Y号实际900mm X-axis infinite, Y-axis 900mm	0.1-12.7mm(0.05mm/单位) 0.1-12.7mm(0.05mm/unit)
ZJ-AM5-AH-B-RK-800	DPX5 7-12E (表面缝线) DPX5 7-12E(I) on the surface	3200rpm(针长3.5mm以下) 3200rpm(stitch length less than 3.5mm)	X号无限大, Y号实际800mm X-axis infinite, Y-axis 800mm	0.1-12.7mm(0.05mm/单位) 0.1-12.7mm(0.05mm/unit)
ZJ-AM5-AH-B-LK-800	DPX5 7-12E (表面缝线) DPX5 7-12E(I) on the surface	3200rpm(针长3.5mm以下) 3200rpm(stitch length less than 3.5mm)	X号无限大, Y号实际800mm X-axis infinite, Y-axis 800mm	0.1-12.7mm(0.05mm/单位) 0.1-12.7mm(0.05mm/unit)
ZJ-AM5-AH-LK-800	DPX5 7-12E (表面缝线) DPX5 7-12E(I) on the surface	3200rpm(针长3.5mm以下) 3200rpm(stitch length less than 3.5mm)	X号无限大, Y号实际800mm X-axis infinite, Y-axis 800mm	0.1-12.7mm(0.05mm/单位) 0.1-12.7mm(0.05mm/unit)

选配装置：-B 代表自动换梭；-RK 代表360° 智能切刀；-K 代表激光刀缝；-LK 代表激光切刀（具体产品与型号以实物为准）

最大线号 Max size	标准4mm Standard 4mm	识别模板 Identification of the template	对模板数量由1到999个变化 Automatically identify 999 kinds of templates	输入电压范围 Input voltage	200V + 44V
存储格式 Pattern Storage	最多支持10个（单个容量为300001） Maximum 100 patterns (maximum 30000 need for one pattern)	文件格式 File format	支持.DXF/.PLT等格式文件 Support format files, such as .dxf/.plt etc.	输出功率 Output power	550W